
Try-Loop® Expansion Loops & Seismic Connectors



Otv	Pipe Size (in.)	DIMENSIONS (in.) A B C			Pressure (PSI) 70° F	Compression (in.)	Extension (in.)	Parrallel (in.)	Rotation "X" Axis (deg.)	Non-Parallel "ץ" Axis (deg.)	Drain Port (in.)	Wt.	Notes
Qty.	1	23.75	15.75	6.50	175	2	2	2	20°	1	1/2	9	Notes
8	1.25	26.75	18.00	6.75	175	2	2	2	15°	1	1/2	11	
9	1.5	27.88	19.50	6.50	175	2	2	2	15°	1	1/2	13	
3	2	31.63	22.25	7.75	175	2	2	2	10°	1	1/2	22	
8	2.5	35.13	25.00	8.75	175	2	2	2	10°	1	3/4	36	
9	3	38.13	28.00	9.00	175	2	2	2	10°	1	3/4	47	
	4	43.63	33.00	12.00	175	2	2	2	5°	1	3/4	72	

MOVEMENT CAPABILITY: +/- 2"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

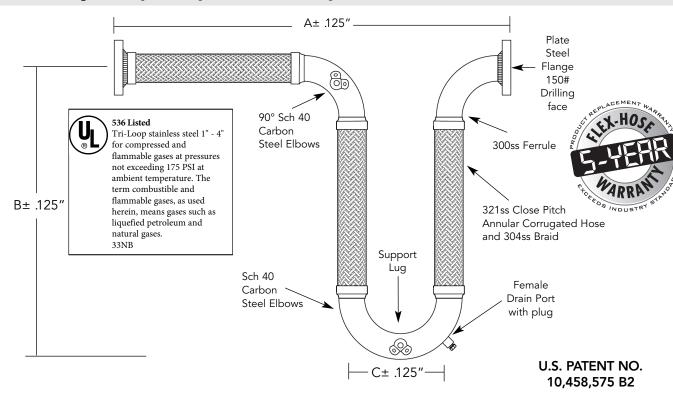

4560 Buckley Road Liverpool, New York USA 13088-2509 315/437-1611 • Fax 315/437-1903

www.flexhose.com • 1.877.TRI FLEX