
Try-Loop® Expansion Loops & Seismic Connectors



Qty.	Pipe Size (in.)	D	IMENSIO (in.) B	NS C	Pressure (PSI) 70° F	Compression (in.)	Extension (in.)	Parrallel (in.)	Rotation "X" Axis (deg.)	Non-Parallel "y" Axis (deg.)	Drain Port (in.)	Wt. (lb.)	Notes
	1	32.50	20.50	10.50	175	4	4	4	30°	2	1/2	10	
	1.25	35.13	22.50	10.75	175	4	4	4	25°	2	1/2	12	
	1.5	36.88	24.50	10.50	175	4	4	4	25°	2	1/2	14	
	2	41.63	28.25	11.75	175	4	4	4	20°	2	1/2	24	
	2.5	44.38	31.00	12.00	175	4	4	4	20°	2	3/4	39	
	3	47.63	34.00	12.50	175	4	4	4	15°	2	3/4	51	
	4	52.88	40.00	14.25	175	4	4	4	10°	2	3/4	77	

MOVEMENT CAPABILITY +/- 4"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

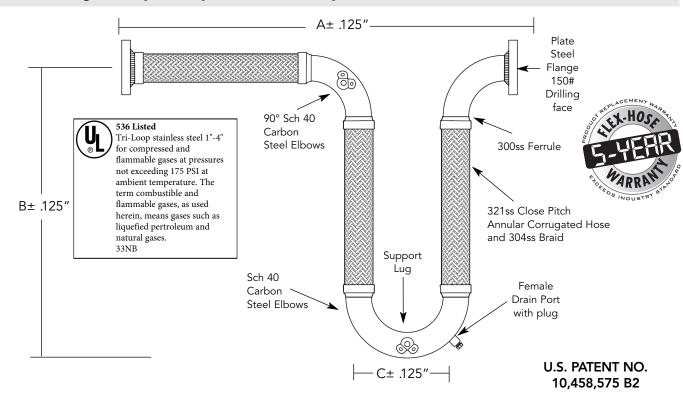

4560 Buckley Road Liverpool, New York USA 13088-2509 315/437-1611 • Fax 315/437-1903

www.flexhose.com • 1.877.TRI FLEX