AssureFlex® Two-Leg U Style Seismic and Expansion Loop for Fire Protection

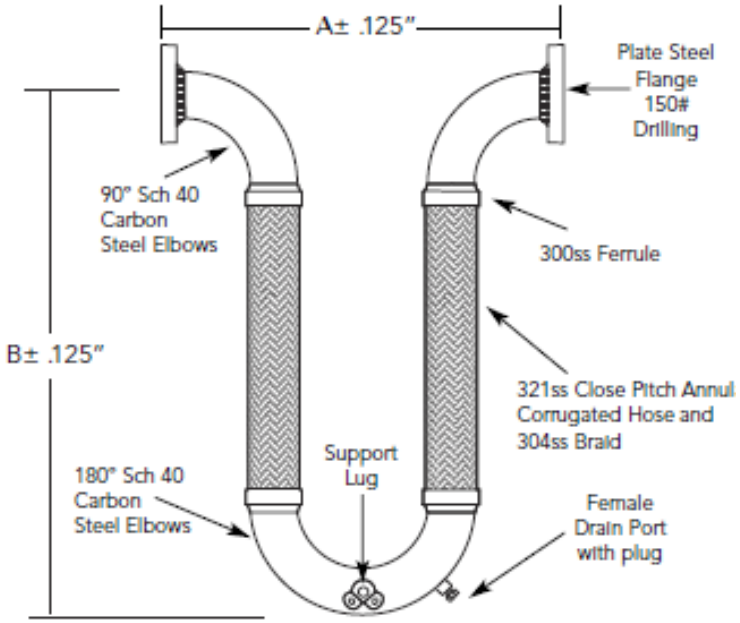

FLEX-HOSE 5-YEAR WARRANTY — PRODUCT REPLACEMENT WARRANTY — EXCEEDS INDUSTRY STANDARD

FM APPROVED
For Fire Protection Systems

c UL us LISTED
EX28995
(Flexible Joint Fitting)

CSA standard B-51 certified.
Inspected and tested by the Technical Standards and Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.) A (in.)	Length (in.) B (in.)	Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
	2.00	33.50	47.00	300	½	33.0	
	2.50	35.50	52.00	300	¾	52.0	
	3.00	37.50	56.00	300	¾	66.0	
	4.00	42.00	63.00	175	¾	102.0	
	5.00	46.00	70.00	175	¾	148.0	
	6.00	50.00	79.00	175	¾	216.0	
	8.00	58.00	99.00	175	¾	427.0	
	10.00	66.50	102.00	175	¾	632.0	
	12.00	76.50	115.00	175	¾	930.0	

MOVEMENT CAPABILITY: +/- 24"

8" -12" ID provided with two braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

FLEX-HOSE CO. INC.
4560 Buckley Road
Liverpool, NY USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX