


FLEXZORBER® NNDFU Double Sphere Union




CSA standard B-51
certified. Inspected
and tested by the
Technical Standards
and Safety Authority
of Canada.

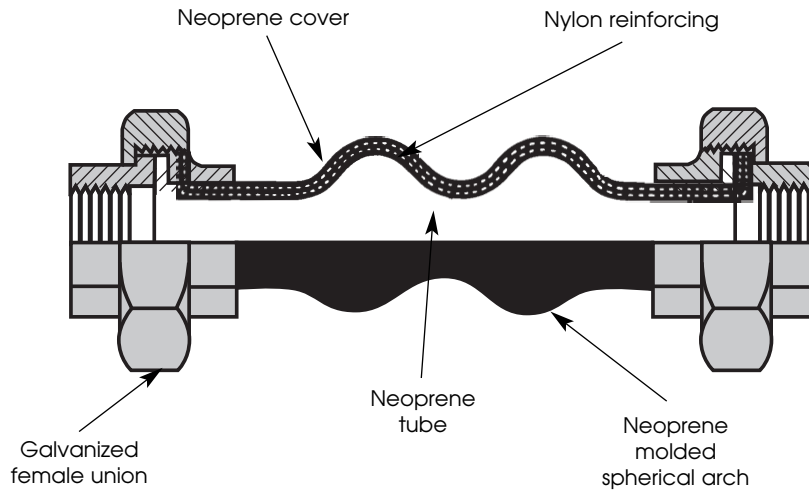

I.D. (IN)	LENGTH (IN)	PRESSURE (PSI)		VAC RATING (in Hg.)	MOVEMENT CAPABILITY				WT. (LBS)
		170°F	220°F		COMPRESSION (IN)	EXTENSION (IN)	PARALLEL (IN)	ANGULAR (Deg)	
3/4	8	150	100	16	7/8	1/4	7/8	45°	2
1.0	8	150	100	16	7/8	1/4	7/8	45°	3
1.25	8	150	100	16	7/8	1/4	7/8	45°	3
1.5	8	150	100	16	7/8	1/4	7/8	45°	4
2.0	8	150	100	16	7/8	1/4	7/8	45°	6

FLEXZORBER® MOVEMENTS

Flex-Hose Co.'s FLEXZORBER® rubber connectors & expansion joints are capable of handling the following movements:

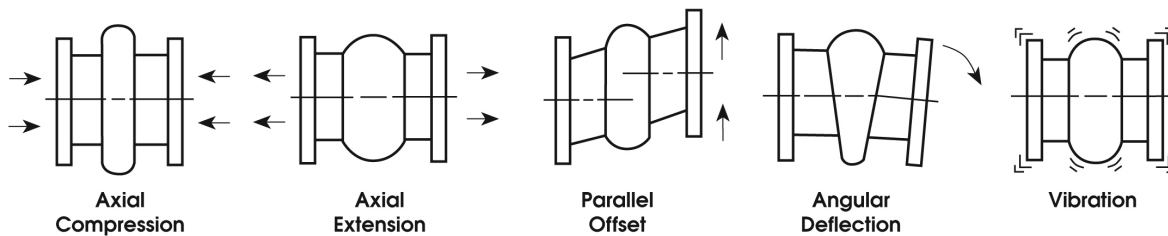

Unrestrained, most rubber expansion joints and connectors will extend when pressurized. Therefore, it is recommended the system be anchored. When anchoring is not practical, please call factory

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, NY USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

REV 03/25