


Pumpsaver® Braided Pump Connectors



FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR S.S.
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.

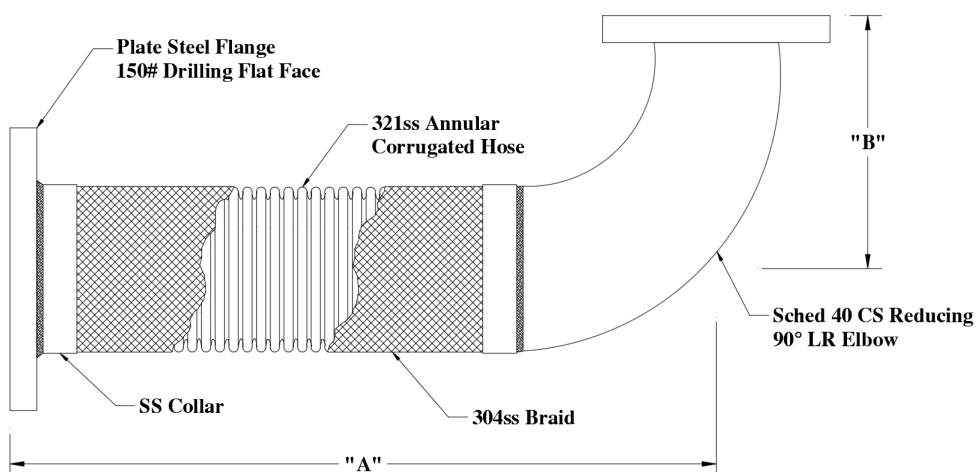

CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

Qty.	I.D. (in.)		A (in.)	B (in.)	Pressure (PSI) 70° F	Parallel Offset (in.)		Weight (lbs.)	Notes
	Small Flange	Large Flange & Hose				Permanent	Intermittent		
	2.00	2.50	12.25	4.00	400	3/8"	1/8"	19.00	
	2.00	3.00	13.00	4.75	288	3/8"	1/8"	21.00	
	2.50	3.00	13.00	4.75	288	3/8"	1/8"	22.00	
	2.00	4.00	14.50	6.25	250	3/8"	1/8"	28.00	
	2.50	4.00	14.50	6.25	250	3/8"	1/8"	29.00	
	3.00	4.00	14.50	6.25	250	3/8"	1/8"	31.00	
	2.50	5.00	18.00	7.75	200	3/8"	1/8"	38.00	
	3.00	5.00	18.00	7.75	200	3/8"	1/8"	40.00	
	4.00	5.00	18.00	7.75	200	3/8"	1/8"	43.00	
	3.00	6.00	19.50	9.25	220	3/8"	1/8"	50.00	
	4.00	6.00	19.50	9.25	220	3/8"	1/8"	53.00	
	5.00	6.00	19.50	9.25	220	3/8"	1/8"	56.00	
	4.00	8.00	23.25	12.25	200	3/8"	1/8"	97.00	
	5.00	8.00	23.25	12.25	200	3/8"	1/8"	100.00	
	6.00	8.00	23.25	12.25	200	3/8"	1/8"	104.00	
	6.00	10.00	27.25	15.25	200	3/8"	1/8"	158.00	
	8.00	10.00	27.25	15.25	200	3/8"	1/8"	163.00	
	10.00	12.00	31.25	18.25	160	3/8"	1/8"	233.00	

*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, NY USA 13088-2509
 Phone 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

STAINLESS STEEL PUMP CONNECTORS

SF/CIEL-15P 2.5"-12" I.D.