


Pumpsaver® Braided Pump Connectors



FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR S.S.
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.

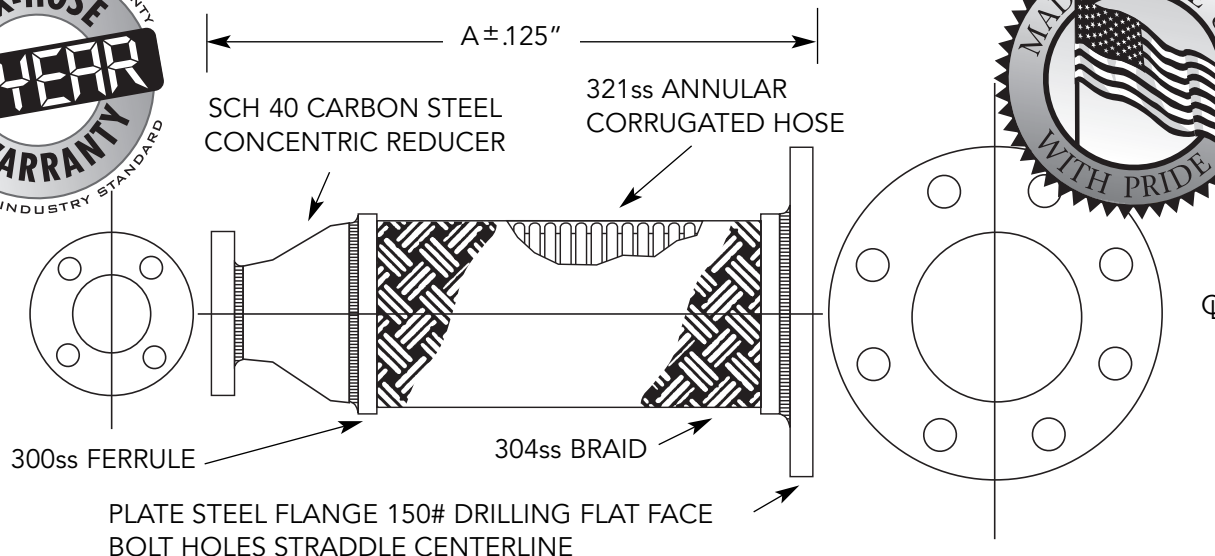

CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.

Qty	I.D. (In.)		Length (In.)	Pressure (PSI) 70°F	Parallel Offset* (In.)		Weight (lb)	Notes
	Small Flange	Large Flange & Hose			Permanent	Intermittent		
	1.50	2.00	14.00	500	2 1/4	3/4	10.20	
	1.50	2.50	15.00	400	1 1/2	3/4	11.60	
	1.50	3.00	16.00	285	1 1/2	3/4	14.40	
	2.00	2.50	15.00	400	1 1/4	3/4	12.80	
	2.00	3.00	16.00	285	1 1/2	3/4	15.60	
	2.00	4.00	18.00	250	1 1/2	3/4	19.90	
	2.50	3.00	16.00	285	1 1/2	3/4	16.70	
	2.50	4.00	18.00	250	1 1/2	3/4	21.20	
	2.50	5.00	20.00	200	1 1/2	3/4	27.50	
	2.50	6.00	22.00	220	1 1/2	3/4	35.10	
	3.00	4.00	18.00	250	1 1/2	3/4	22.30	
	3.00	5.00	20.00	200	1 1/2	3/4	28.30	
	3.00	6.00	22.00	220	1 1/2	3/4	35.90	
	4.00	5.00	20.00	200	1 1/2	3/4	30.20	
	4.00	6.00	22.00	220	1 1/2	3/4	37.80	
	4.00	8.00	25.00	215	1 1/2	3/4	58.90	
	5.00	6.00	22.00	220	1 1/2	3/4	40.80	
	5.00	8.00	25.00	215	1 1/2	3/4	61.10	
	6.00	8.00	25.00	215	1 1/2	3/4	62.30	
	6.00	10.00	28.00	200	1 1/2	3/4	92.00	
	8.00	10.00	28.00	200	1 1/2	3/4	103.90	
	10.00	12.00	30.00	160	1 1/2	3/4	135.90	

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, NY USA 13088
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

STAINLESS STEEL PUMP CONNECTORS

SF/CI-15P-34I 2"-12" I.D.