


Pumpsaver® Braided Pump Connectors

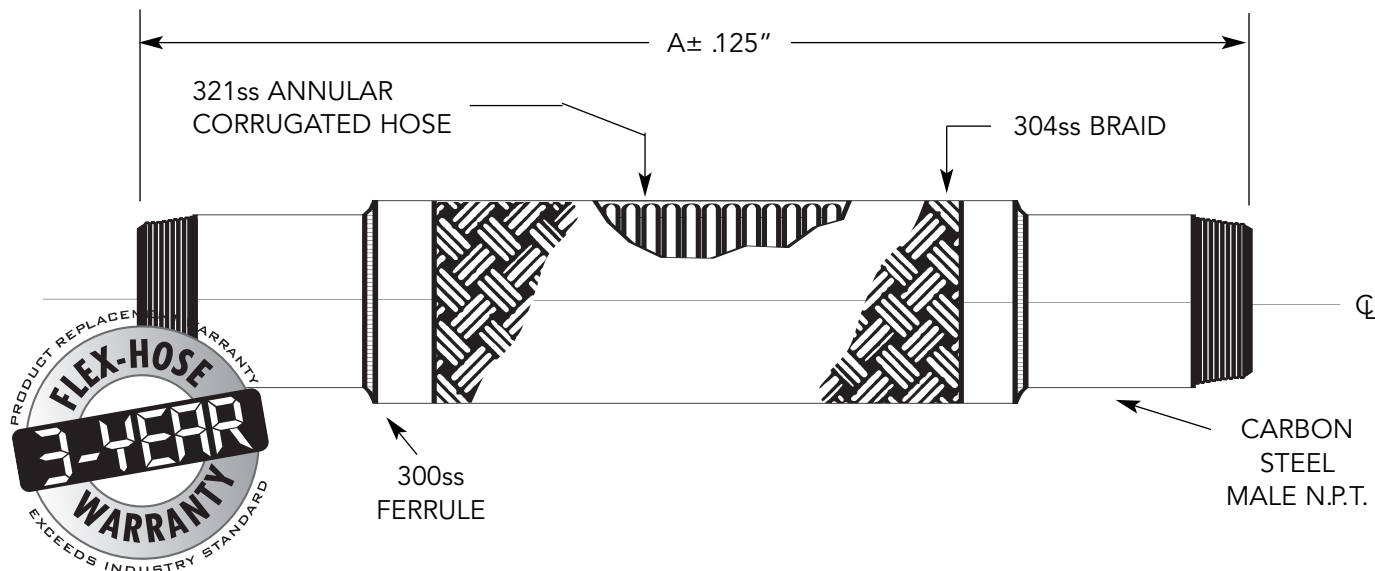

FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR S.S.
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.

Qty	I.D. (In.)	A (In.)	Pressure (PSI) 70°F	Parallel Offset (In.) Permanent	Intermittent	Weight (lb)	NOTES
	.50	10.00	1100	1¼	¾	.67	
	.75	11.00	800	1¼	¾	1.03	
	1.00	12.00	750	1½	¾	1.30	
	1.25	13.00	600	2	¾	1.57	
	1.50	13.00	555	1½	¾	1.90	
	2.00	16.00	500	2	¾	3.20	
	2.50	17.00	385	2	¾	5.44	
	3.00	18.00	285	1½	¾	7.68	
	4.00	19.00	230	1½	¾	10.10	

*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.

END FITTING OPTIONS: SCH'D 40 IPS ☐

SCH'D 80 IPS ☐



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.



This product is listed by IAPMO R&T under file #N-7208 for NSF/ANSI 61 and file 7207 for California Lead Plumbing Law and NSF/ANSI-372. Our listed products can be viewed on IAPMO R&T's Web listing at <http://pld.iapmo.org>

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



6801 Crossbow Drive
East Syracuse, NY USA 13057-1026
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX



WS20160408

STAINLESS STEEL PUMP CONNECTORS

SMN-34I ½"-4" I.D.