


Pumpsaver® Braided Pump Connectors

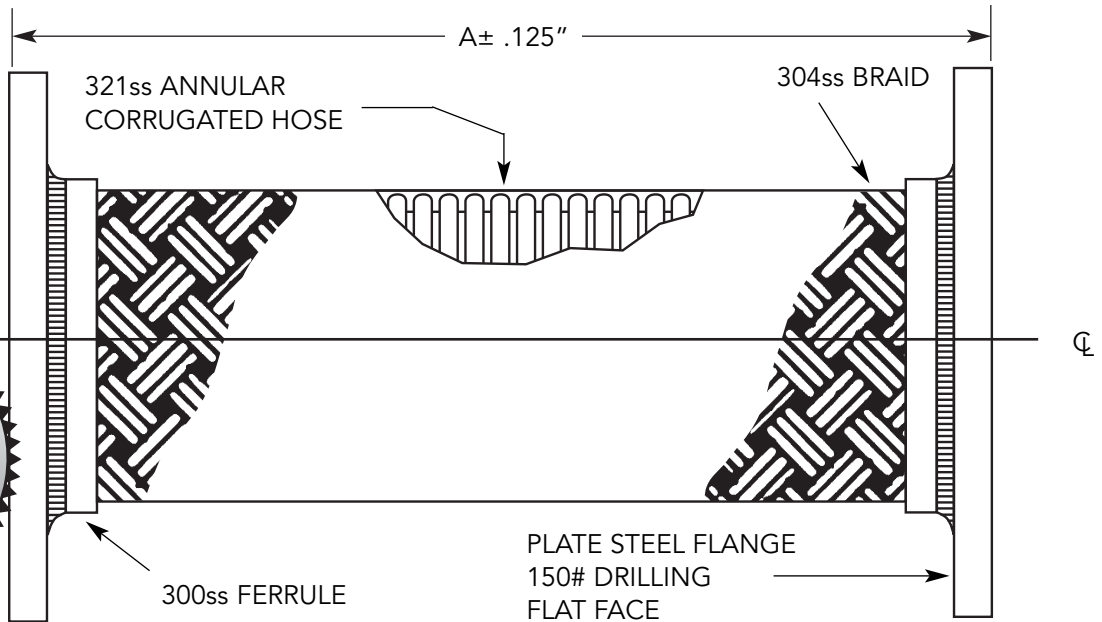

FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR S.S.
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.

Qty	I.D. (In.)	A (In.)	Pressure (PSI) 70°F	Parallel Offset (In)		Weight (lb)	Notes
	2.00	11.00	500	1½	¾	10.30	
	2.50	12.00	400	1½	¾	12.50	
	3.00	13.00	285	1½	¾	14.00	
	4.00	14.00	250	1½	¾	20.50	
	5.00	16.00	200	1½	¾	27.30	
	6.00	17.00	220	1½	¾	33.10	
	8.00	20.00	215	1½	¾	60.20	
	10.00	21.00	200	1½	¾	83.90	
	12.00	23.00	160	1½	¾	116.30	
	14.00	25.00	150	1½	¾	156.00	
	16.00	30.00	110	1½	¾	195.60	

*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.



This product is listed by IAPMO R&T under file #N-7208 for NSF/ANSI 61 and file 7207 for California Lead Plumbing Law and NSF/ANSI-372. Our listed products can be viewed on IAPMO R&T's Web listing at <http://pld.iapmo.org>

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, NY USA 13088
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX

WS20160408

STAINLESS STEEL PUMP CONNECTORS

SMP-34I 2"-16" I.D.