


Pumpsaver® Braided Pump Connectors

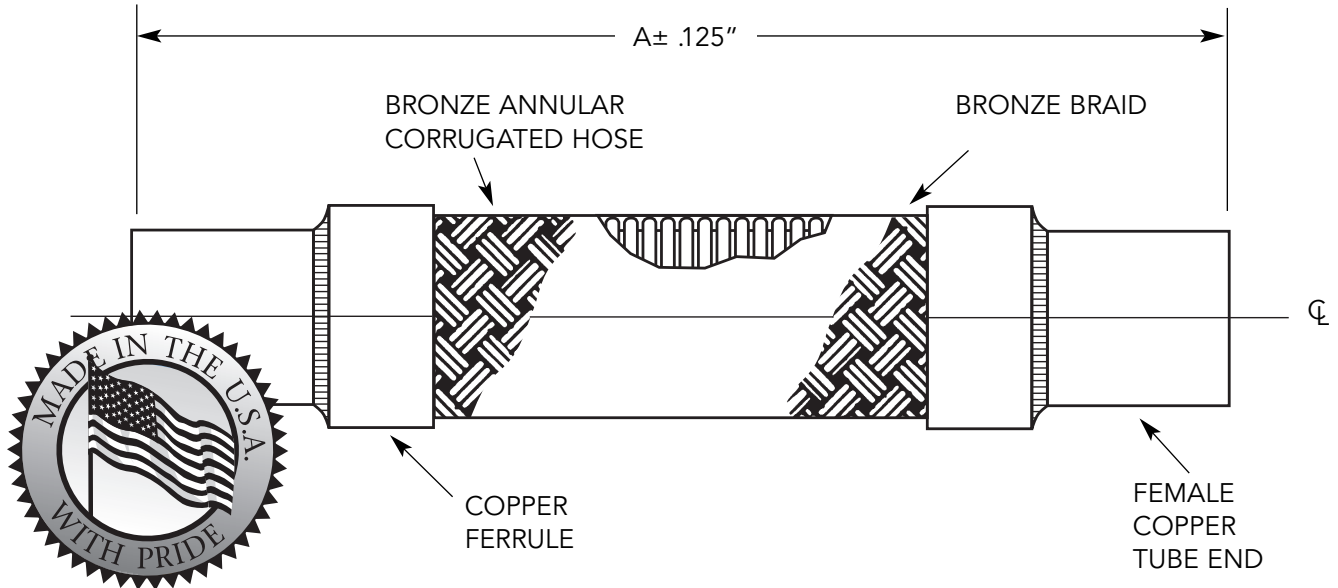

FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR BRONZE
70	1.00
200	.90
300	.82
400	.75

*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.

Qty	I.D. (In.)	A (In.)	Pressure (PSI) 70°F	Parallel Offset (In.) Permanent	Intermittent	Weight (lb)
	.50	9.00	565	2¼	¾	.63
	.75	10.50	465	2¼	¾	1.07
	1.00	11.50	335	2¼	¾	1.35
	1.25	12.50	305	2	¾	2.02
	1.50	13.50	295	1¾	¾	2.77
	2.00	15.00	210	1½	¾	4.29
	2.50	17.00	190	1½	¾	7.50
	3.00	18.50	165	1½	¾	9.70

*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.



This product is listed by IAPMO R&T under file #N-7208 for NSF/ANSI 61 and file 7207 for California Lead Plumbing Law and NSF/ANSI-372. Our listed products can be viewed on IAPMO R&T's Web listing at <http://pld.iapmo.org>. This BSW copper product has been evaluated for use in drinking water systems pH 6.5 and above. Drinking water supplies that are less than pH 6.5 may require corrosion control to limit leaching of copper into the drinking water.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, NY USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.METAL EJ

WS20160408

BRONZE PUMP CONNECTORS

BSW-34I ½"-3" I.D.