


Try-Flex Loop® Expansion Loops & Seismic Connectors

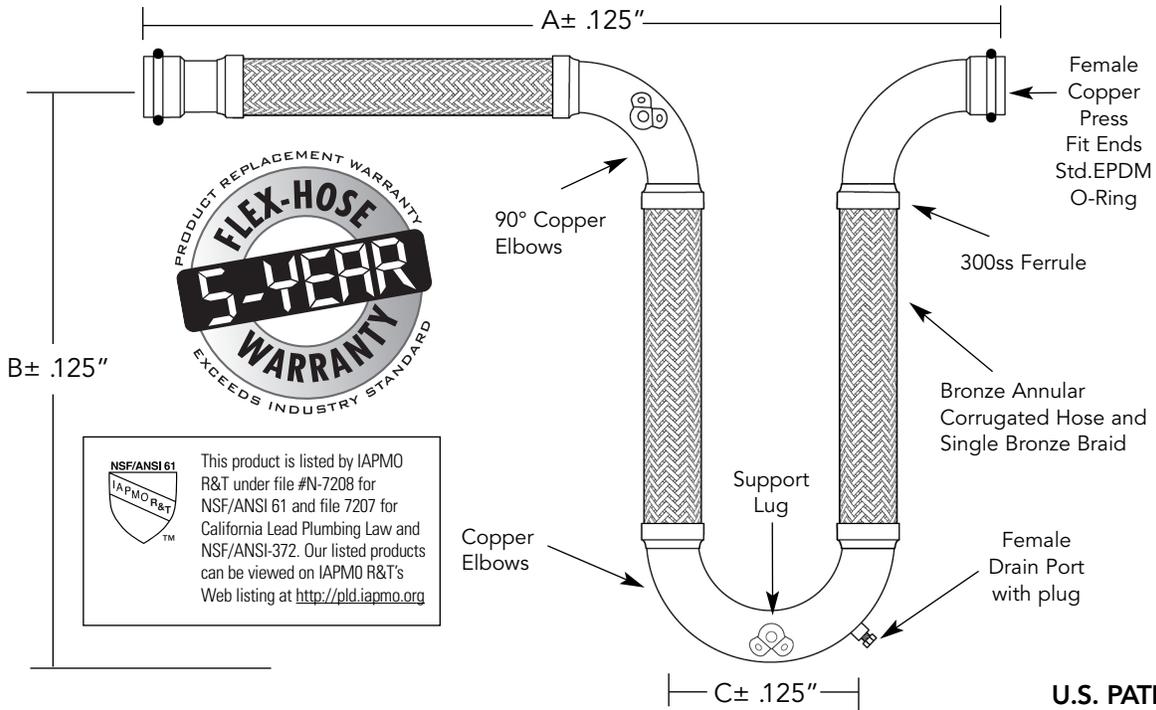

U.S. PATENT NO.
10,458,575 B2

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI) 250°F	COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C									
	½	29.63	18.38	10.00	200	4	4	4	35°	2	¼	2.5	
	¾	33.00	21.00	10.00	200	4	4	4	30°	2	¼	5.3	
	1	35.63	23.50	10.25	200	4	4	4	30°	2	½	5.5	
	1.25	38.00	25.63	10.50	200	4	4	4	25°	2	½	9.2	
	1.5	42.75	29.25	10.75	200	4	4	4	25°	2	½	14.0	
	2	49.50	33.63	11.50	180	4	4	4	20°	2	½	18.0	

*Working pressures based on maximum fitting capability at 250°F.

MOVEMENT CAPABILITY: +/-4"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX