


Try-Flex Loop® Expansion Loops & Seismic Connectors

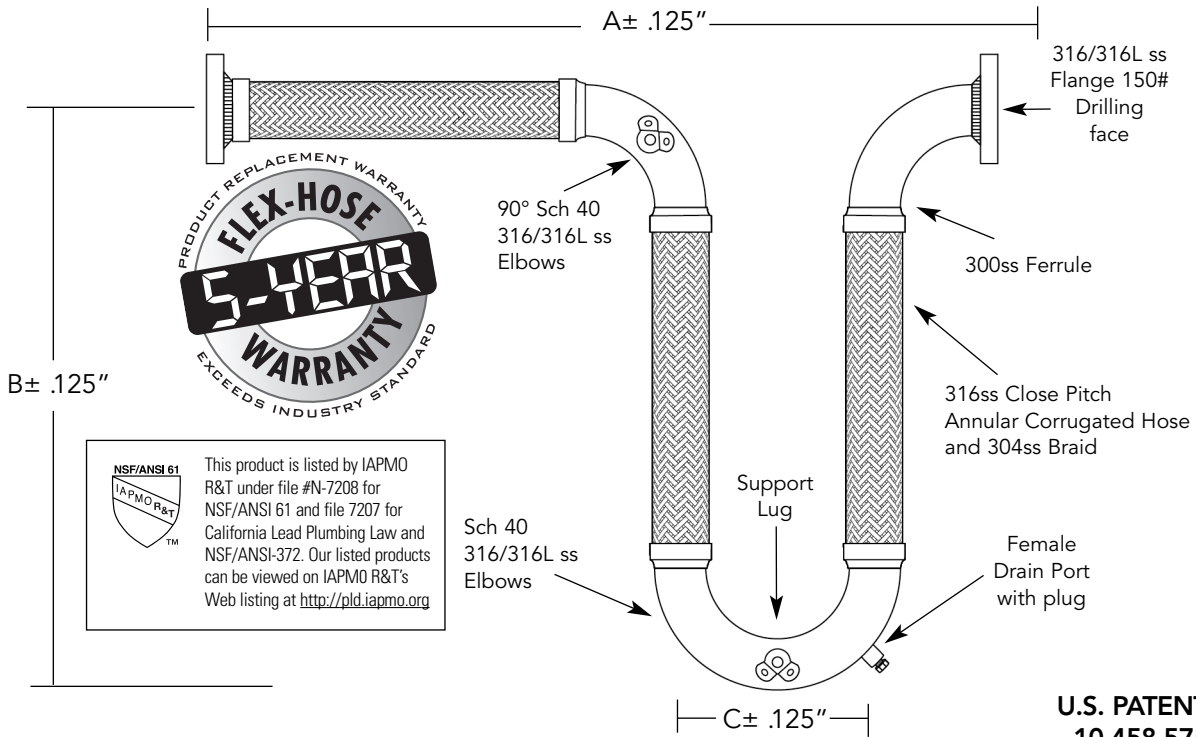

U.S. PATENT NO.
10,458,575 B2

QTY.	PIPE SIZE (IN.)	DIMENSIONS (IN.)			PRESSURE (PSI)		COMPRESSION (IN.)	EXTENSION (IN.)	PARALLEL (IN.)	ROTATION "X" AXIS (DEG)	NON-PARALLEL "Y" AXIS (DEG)	DRAIN PORT (IN.)	WT. (LBS.)	NOTES
		A	B	C	70°F	200°F								
	1.00	32.50	20.50	10.50	750	705	4	4	4	30°	2	¼	9.4	
	1.25	35.13	22.50	10.75	725	681	4	4	4	25°	2	½	12.0	
	1.5	36.88	24.50	10.50	565	531	4	4	4	25°	2	½	14.0	
	2	41.63	28.25	11.75	500	470	4	4	4	20°	2	½	24.0	
	2.5	44.38	31.00	12.00	400	376	4	4	4	20°	2	¾	39.0	
	3	47.63	34.00	12.50	285	267	4	4	4	15°	2	¾	51.0	
	4	52.88	40.00	14.25	250	235	4	4	4	10°	2	¾	77.0	
	5.0	64.25	51.00	15.00	200	188	4	4	4	10°	2	¾	142.0	
	6.0	70.00	54.25	18.00	220	206	4	4	4	5°	2	¾	170.0	
	8.0	84.25	63.25	24.00	215	202	4	4	4	5°	2	¾	333.0	
	10.00	100.25	74.38	30.00	200	188	4	4	4	3°	2	¾	542.0	
	12.00	115.25	84.38	36.00	160	150	4	4	4	3°	2	¾	803.0	

MOVEMENT CAPABILITY: +/-4"

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, New York USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX