


AssureFlex® Two-Leg U Style Seismic and Expansion Loop for Fire Protection

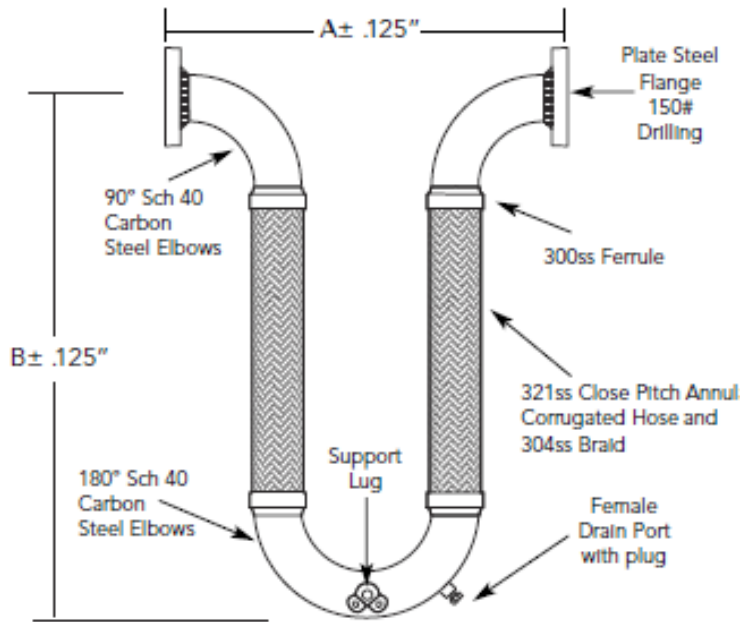

CSA standard B-51 certified.
Inspected and tested by the
Technical Standards and
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	2.00	14.50	25.00	300	½	21.0	
	2.50	16.00	28.00	300	¾	32.0	
	3.00	18.50	30.00	300	¾	42.0	
	4.00	24.50	35.00	175	¾	67.0	
	5.00	30.50	40.00	175	¾	105.0	
	6.00	36.50	46.00	175	¾	154.0	
	8.00	48.50	58.00	175	¾	316.0	
	10.00	60.50	63.25	175	¾	497.0	
	12.00	72.50	72.25	175	¾	736.0	

MOVEMENT CAPABILITY: +/- 4"

8" -12" ID provided with two braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, NY USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX