


AssureFlex® Braided Pump Connectors for Fire Protection

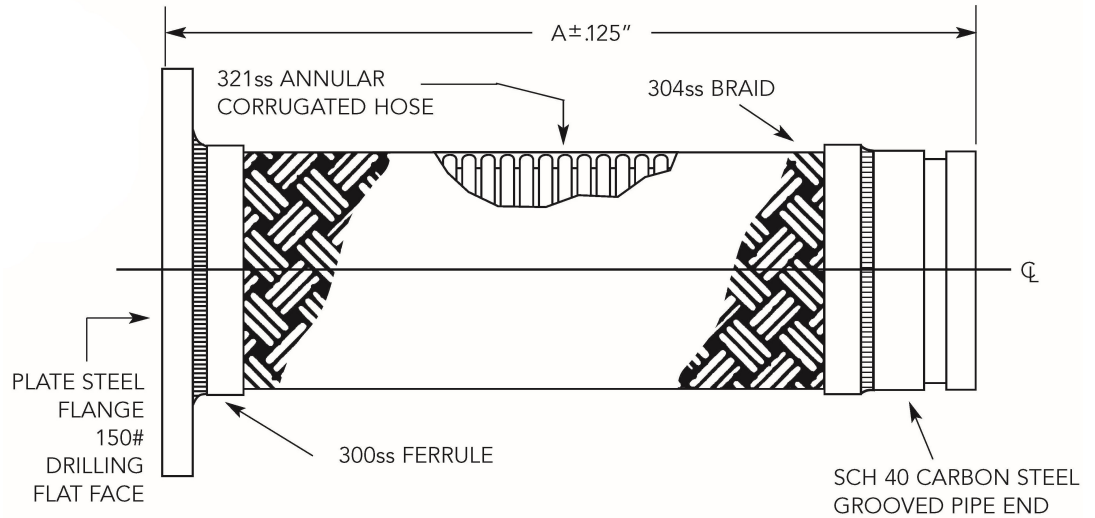

FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR S.S.
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

QTY	ID (in.)	A (in.)	Pressure (PSI) @70° F	Lateral Offset (in.)		Weight (lb.)	Notes
				Permanent (in.)	Intermittent (in.)		
	2.00	12.00	300	1 7/8	5/8	7.2	
	2.50	12.00	300	1 5/8	7/8	8.5	
	3.00	12.00	300	1 1/8	1/2	11.4	
	4.00	12.00	175	5/8	1/4	14	
	5.00	14.00	175	7/8	3/8	18.4	
	6.00	14.00	175	3/4	3/8	25	
	8.00	15.00	175	5/8	1/4	44	
	10.00	16.00	175	1/2	1/4	66	
	12.00	17.00	175	1/2	1/4	88	

*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.

8" - 12" hose & braid provided double braided.

*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.



PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, NY USA 13088-2509
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.METAL EJ

