


# AssureFlex® Tri-Flex® Loop Expansion Loops & Seismic Connectors For Fire Protection

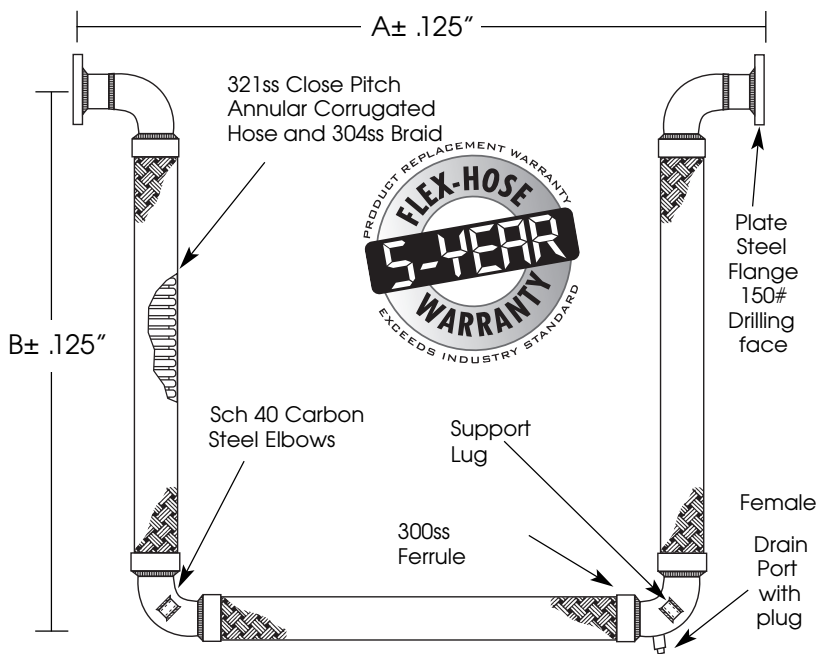


**UL** US  
LISTED  
EX28995  
(Flexible Joint Fitting)

**CSA** CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

Qty	I.D. (in.)	Dimensions		Pressure (PSI) @ 70° F	Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		"A" (in.)	"B" (in.)		Compression (in.)	Extension (in.)	Parallel (in.)	Rotate "X" Axis (Deg.)	Non-parallel "Y" Axis (in.)			
	4.00	50.25	50.50	300	8	8	8	10°	2	¾"	102	
	5.00	67.38	69.75	300	8	8	8	10°	2	¾"	210	
	6.00	76.75	78.00	300	8	8	8	5°	2	¾"	262	

Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor. Provided with two braids.

## Movement Capabilities

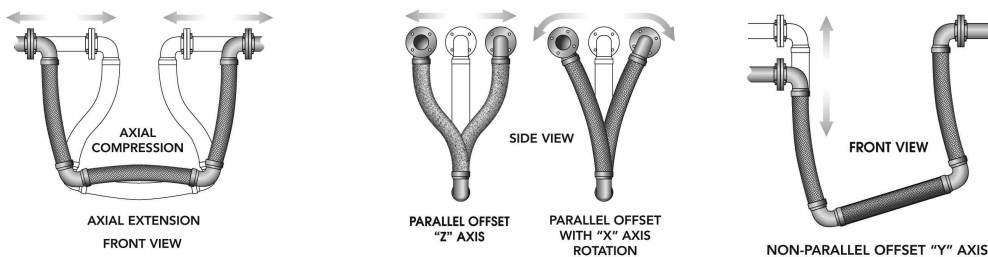

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	

**fh** FLEX-HOSE CO. INC.

4560 Buckley Road • Liverpool, NY USA 13088-2509  
315-437-1611 • Fax 315-437-1903  
www.flexhose.com • 1.877.TRI.FLEX