


AssureFlex® Tri-Flex Loop® Expansion Loops & Seismic Connectors for Fire Protection

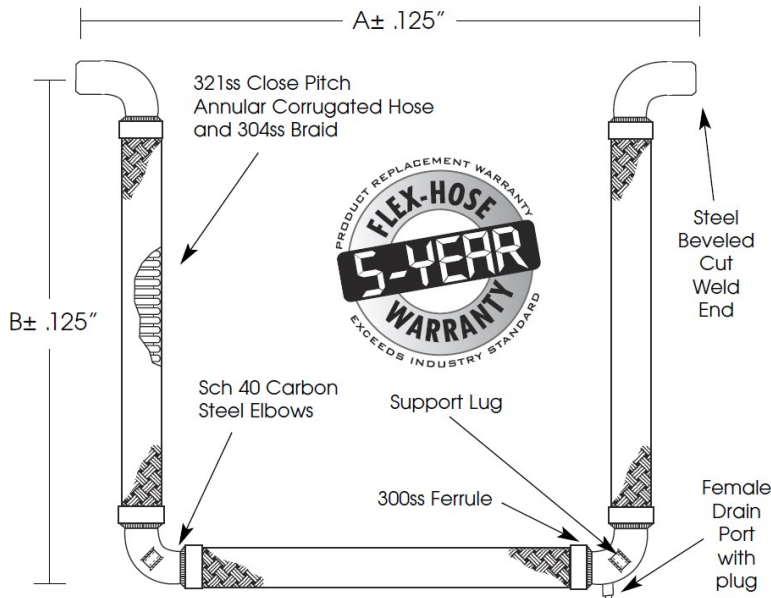


UL US
LISTED
EX28995
(Flexible Joint Fitting)

CSA
CSA standard B-51 certified.
Inspected and tested by the
Technical Standards and
Safety Authority of Canada.

Qty	(in.)	Dimensions		(PSI)	Movement Capability					Port	(lb.)	Notes
		(in.)	(in.)		(in.)	(in.)	(in.)	(in.)	Axis (Deg.)			
	4.00	55.75	50.50	300	8.0	8.0	8.0	10°	2.0	¾"	86	
	5.00	71.25	64.00	300	8.0	8.0	8.0	10°	2.0	¾"	178	
	6.00	77.00	67.50	300	8.0	8.0	8.0	5°	2.0	¾"	213	

Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor. Provided with two braids.

Movement Capability

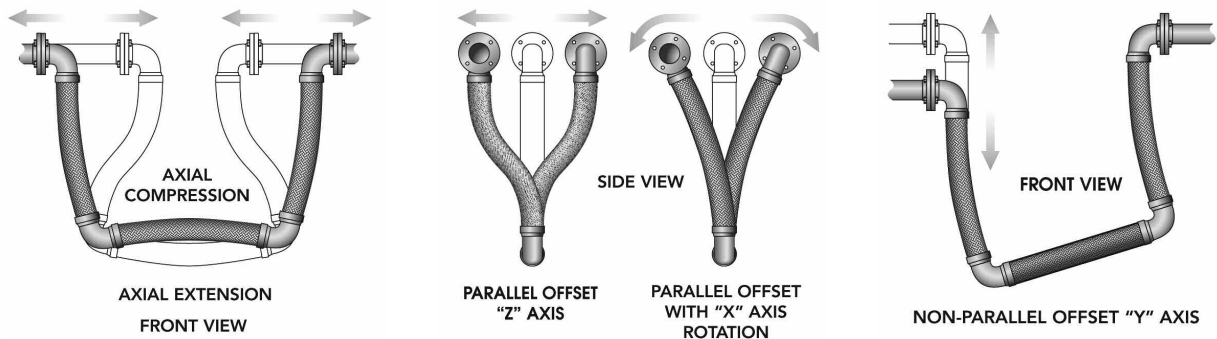

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road • Liverpool, NY USA 13088-2509
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX