


AssureFlex® Tri-Loop® Expansion Loops & Seismic Loops For Fire Protection

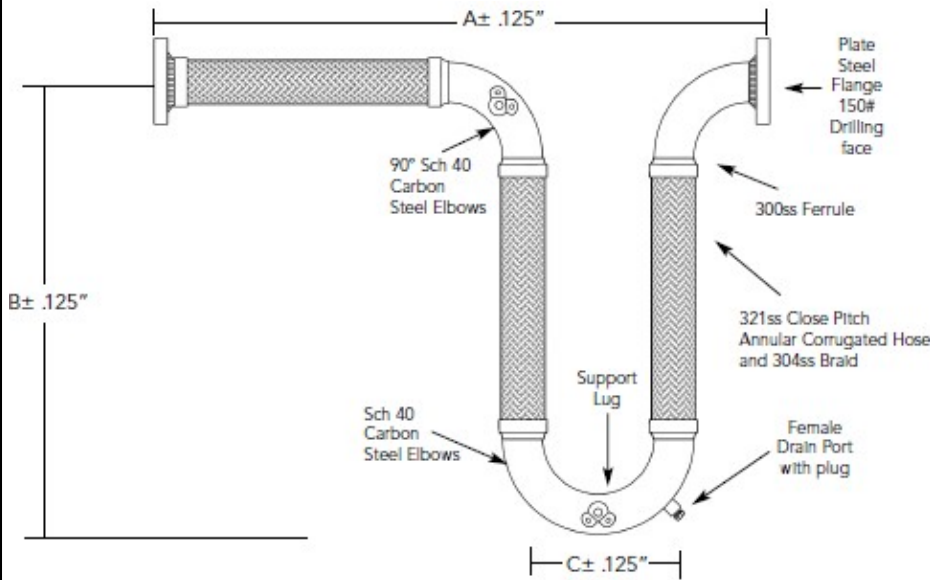


CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

U.S. Patent No. 10,458,575 B2

Qty	I.D. (in.)	Dimensions				Pressure (PSI) @70° F	Movement Capability					Drain Port (in.)	Wt. (lb.)	Notes
		"A" (in.)	"B" (in.)	"C" (in.)	Compression (in.)		Extension (in.)	Parallel (in.)	Rotate "X" Axis (Deg.)	Non-Parallel "Y" Axis (in.)				
	4.00	43.63	33.00	12.00	300	2.0	2.0	2.0	5°	1.0	¾"	77		
	5.00	57.50	44.25	15.00	300	2.0	2.0	2.0	5°	1.0	¾"	147		
	6.00	66.00	50.75	18.00	300	2.0	2.0	2.0	3°	1.0	¾"	197		

Working pressure shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor. Provided with two braids.

Tri-Loop Movement Capabilities

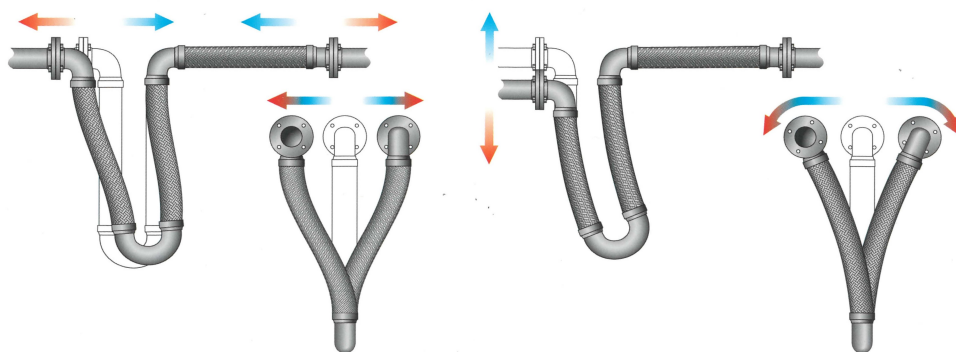

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, New York USA 13088-2509
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.TRI FLEX

Rev. 09/23