


AssureFlex™ Two-Leg U Style Seismic and Expansion Loop for Fire Protection



UL US
LISTED
EX28995
(Flexible Joint Fitting)

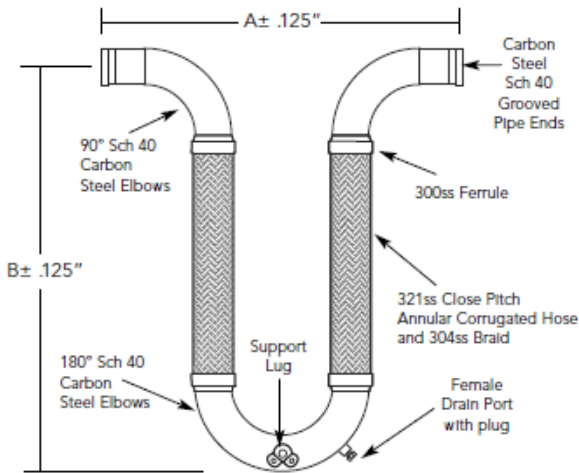

CSA standard B-51 certified.
Inspected and tested by the
Technical Standards and
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	1.00	18.00	23.00	300	½	8.0	
	1.25	19.00	25.00	300	½	10.0	
	1.50	21.00	27.00	300	½	15.0	
	2.00	23.00	30.00	300	½	19.0	
	2.50	25.00	34.00	300	¾	31.0	
	3.00	27.00	37.00	300	¾	45.0	
	4.00	31.50	43.00	175	¾	64.0	
	5.00	36.00	48.00	175	¾	105.0	
	6.00	42.00	55.00	175	¾	160.0	
	8.00	56.00	70.00	175	¾	297.0	
	10.00	68.00	74.50	175	¾	485.0	
	12.00	80.00	84.50	175	¾	675.0	

MOVEMENT CAPABILITY: +/- 8"

8" - 12" ID provided with two stainless steel over braids.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, NY USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX