


AssureFlex® Two-Leg V Style Seismic and Expansion Loop for Fire Protection

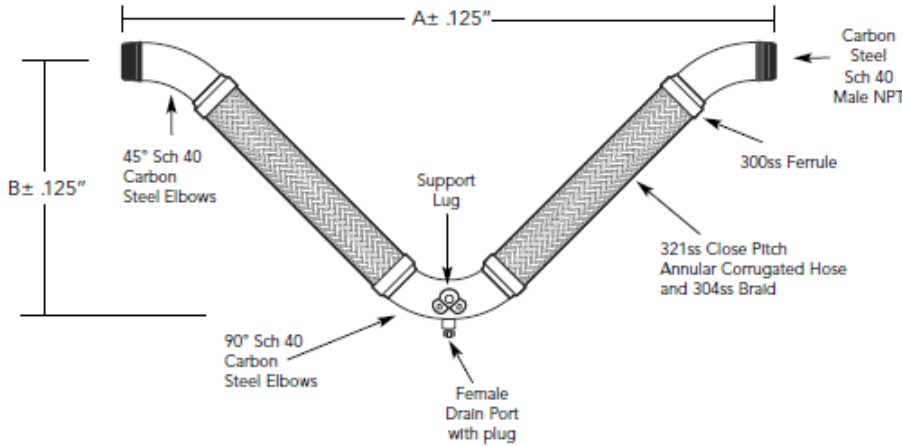

CSA standard B-51 certified.
Inspected and tested by the
Technical Standards and
Safety Authority of Canada.

QTY.	I.D. (in.)	Length (in.)		Pressure (PSI) @70° F	Drain Port (in.)	Weight (lb.)	Comments
		A (in.)	B (in.)				
	½"	28.50	12.25	300	¼	1.5	
	¾"	30.63	13.00	300	¼	2.0	
	1.00	32.88	14.00	300	½	3.5	
	1.25	36.25	15.13	300	½	5.5	
	1.50	40.00	16.88	300	½	6.0	
	2.00	43.38	18.25	300	½	10.0	
	2.50	49.25	20.75	300	¾	18.0	
	3.00	54.00	22.88	300	¾	24.0	
	4.00	62.63	25.50	175	¾	38.0	

MOVEMENT CAPABILITY: +/- 4" Seismic, +/- 6" Thermal

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
Liverpool, NY USA 13088-2509
315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.TRI FLEX