


FLEXPRESS™ FP-D/150 Externally Pressurized Guided Expansion Joints



Maximum Temperature 650°F

Qty	Design Pressure 150 PSIG • Test Pressure 225 PSIG				
	I.D. (In.)	Bellows Area (Sq. In.)	Length (In.)	Movement Capability (In.) Compression Extension	Weight (Lbs.)
<input type="checkbox"/>	2.00	12	43.25	8.00 1.50	70.00
<input type="checkbox"/>			61.25	12.00 2.25	95.00
<input type="checkbox"/>			75.25	16.00 3.00	112.00
<input type="checkbox"/>	2.50	12	43.25	8.00 1.50	79.00
<input type="checkbox"/>			61.25	12.00 2.25	106.00
<input type="checkbox"/>			75.25	16.00 3.00	126.00
<input type="checkbox"/>	3.00	16	41.25	8.00 1.50	98.00
<input type="checkbox"/>			54.25	12.00 2.25	120.00
<input type="checkbox"/>			71.25	16.00 3.00	154.00
<input type="checkbox"/>	4.00	30	42.50	8.00 1.50	153.00
<input type="checkbox"/>			56.00	12.00 2.25	188.00
<input type="checkbox"/>			73.75	16.00 3.00	242.00
<input type="checkbox"/>	5.00	42	40.25	8.00 1.50	200.00
<input type="checkbox"/>			52.50	12.00 2.25	242.00
<input type="checkbox"/>			64.75	16.00 3.00	286.00
<input type="checkbox"/>	6.00	53	40.25	8.00 1.50	222.00
<input type="checkbox"/>			52.50	12.00 2.25	268.00
<input type="checkbox"/>			64.75	16.00 3.00	316.00
<input type="checkbox"/>	8.00	83	42.50	8.00 1.50	320.00
<input type="checkbox"/>			55.75	12.00 2.25	414.00
<input type="checkbox"/>			69.00	16.00 3.00	490.00
<input type="checkbox"/>	10.00	135	45.25	8.00 2.00	450.00
<input type="checkbox"/>			59.50	12.00 3.00	554.00
<input type="checkbox"/>			78.00	16.00 4.00	706.00
<input type="checkbox"/>	12.00	182	47.25	8.00 2.00	583.00
<input type="checkbox"/>			62.50	12.00 3.00	717.00
<input type="checkbox"/>			81.75	16.00 4.00	907.00
<input type="checkbox"/>	14.00	212	47.50	8.00 2.00	709.00
<input type="checkbox"/>			62.75	12.00 3.00	857.00
<input type="checkbox"/>			82.00	16.00 4.00	1069.00
<input type="checkbox"/>	16.00	276	48.00	8.00 2.00	774.00
<input type="checkbox"/>			63.25	12.00 3.00	940.00
<input type="checkbox"/>			82.50	16.00 4.00	1176.00
<input type="checkbox"/>	18.00	338	48.25	8.00 2.00	893.00
<input type="checkbox"/>			63.50	12.00 3.00	1077.00
<input type="checkbox"/>			82.75	16.00 4.00	1341.00
<input type="checkbox"/>	20.00	404	49.00	8.00 2.00	1054.00
<input type="checkbox"/>			64.25	12.00 3.00	1254.00
<input type="checkbox"/>			83.50	16.00 4.00	1544.00
<input type="checkbox"/>	22.00	481	49.25	8.00 2.00	1128.00
<input type="checkbox"/>			64.50	12.00 3.00	1348.00
<input type="checkbox"/>			84.75	16.00 4.00	1662.00
<input type="checkbox"/>	24.00	562	49.50	8.00 2.00	1292.00
<input type="checkbox"/>			64.75	12.00 3.00	1528.00
<input type="checkbox"/>			84.00	16.00 4.00	1870.00

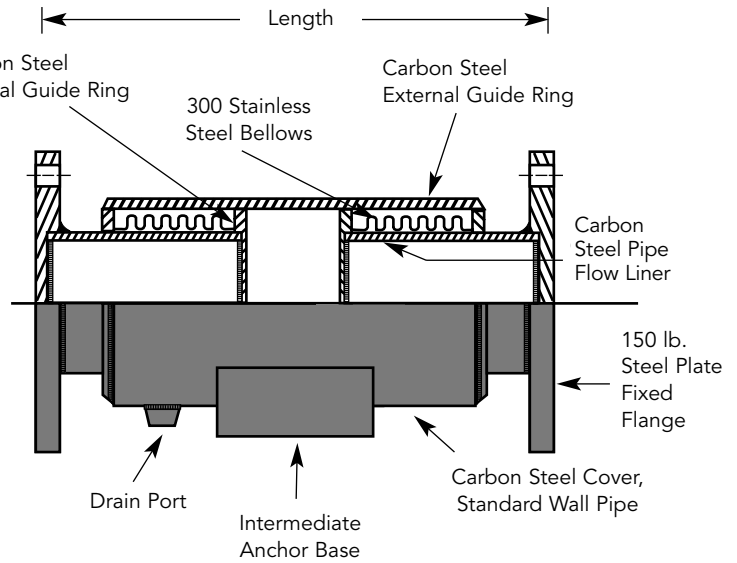

Notes



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.



4560 Buckley Road
 Liverpool, NY USA 13088-2509
 315/437-1611 • Fax 315/437-1903
 www.flexhose.com • 1.877.METAL EJ

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	