


Pumpsaver® Braided Pump Connectors

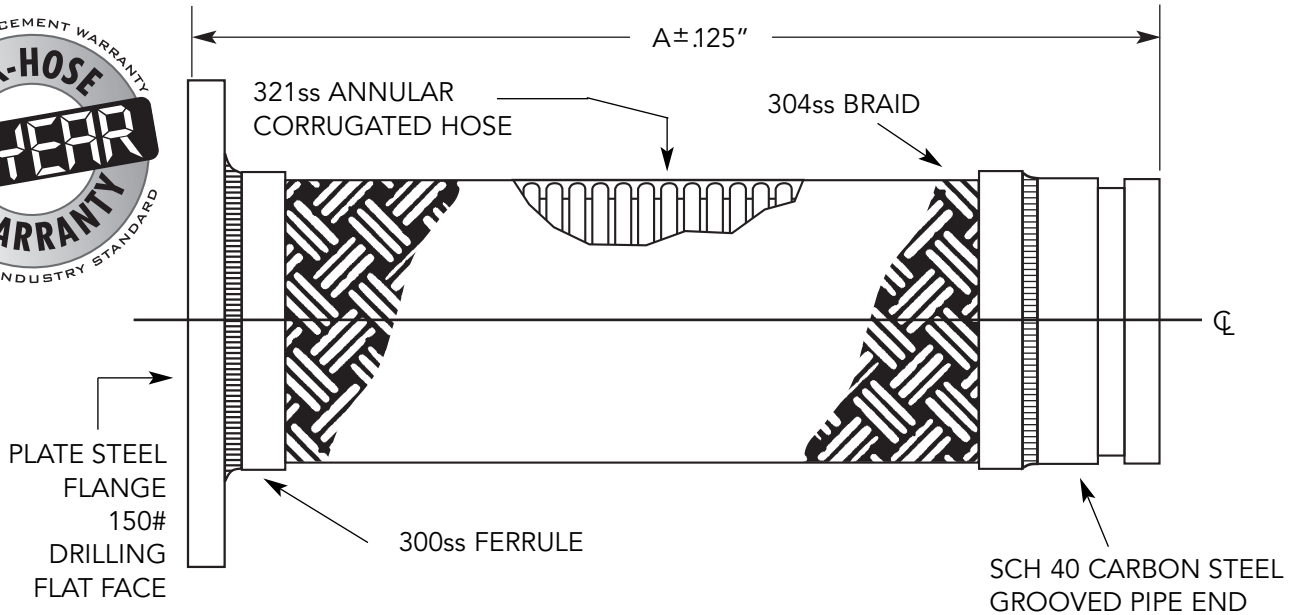

FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR S.S.
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

Qty.	I.D (in.)	A (in.)	Pressure (PSI) 70° F	Parallel Offset (in.)		Weight (lbs.)	Notes
				Permanent	Intermittent		
	2.00	12.00	500	1 ⁷ / ₈	5 ⁵ / ₈	7.20	
	2.50	12.00	400	1 ⁵ / ₈	5 ⁵ / ₈	8.50	
	3.00	12.00	285	1 ¹ / ₈	1 ¹ / ₂	10.40	
	4.00	12.00	250	5 ⁵ / ₈	1 ¹ / ₄	14.00	
	5.00	14.00	200	7 ⁷ / ₈	3 ³ / ₈	18.40	
	6.00	14.00	220	3 ³ / ₄	3 ³ / ₈	23.70	
	8.00	15.00	200	5 ⁵ / ₈	1 ¹ / ₄	39.60	
	10.00	16.00	200	1 ¹ / ₂	1 ¹ / ₄	61.50	
	12.00	17.00	160	1 ¹ / ₂	1 ¹ / ₄	81.00	

*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.

*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.



PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road
 Liverpool, NY USA 13088-2509
 315/437-1611 • Fax 315/437-1903
www.flexhose.com • 1.877.METAL EJ