


# Pumpsaver® Braided Pump Connectors

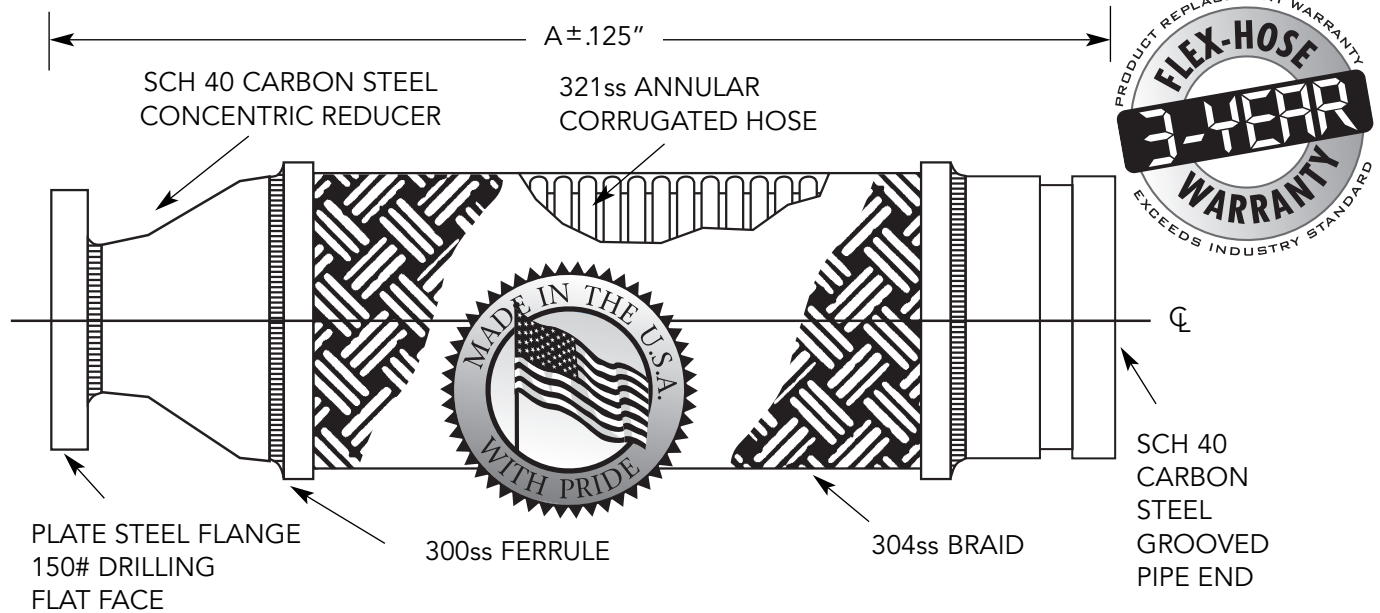

FOR TEMP ABOVE 70°F	
TEMP °F	FACTOR S.S.
70	1.00
200	.94
300	.88
400	.83
500	.78
600	.74

\*For safe working pressure above 70°F, multiply pressure shown at 70°F times correction factor of required temp.

Qty.	I.D. (in.)		A (in.)	Pressure (PSI) 70° F	Parallel Offset (in.)		Weight (lbs.)	Notes
	Small Flange	Large Groove & Hose			Permanent	Intermittent		
	1.50	2.00	14.00	500	1 1/2	5/8	6.70	
	1.50	2.50	14.00	400	1 1/4	3/8	6.90	
	2.00	2.50	14.00	400	1 1/4	3/8	8.10	
	2.00	3.00	14.00	285	3/4	3/8	10.10	
	2.00	4.00	15.00	250	1/2	1/4	12.00	
	2.50	3.00	14.00	285	3/4	3/8	11.20	
	2.50	4.00	15.00	250	1/2	1/4	14.70	
	2.50	5.00	18.00	200	3/4	3/8	18.90	
	2.50	6.00	19.00	220	3/4	3/8	25.30	
	3.00	4.00	15.00	250	1/2	1/4	15.50	
	3.00	5.00	18.00	200	3/4	3/8	19.70	
	3.00	6.00	19.00	220	3/4	3/8	26.10	
	4.00	5.00	18.00	200	3/4	3/8	21.60	
	4.00	6.00	19.00	220	3/4	3/8	28.00	
	4.00	8.00	20.00	200	5/8	1/4	38.40	
	5.00	6.00	19.00	220	3/4	3/8	31.00	
	5.00	8.00	20.00	200	5/8	1/4	40.70	
	6.00	8.00	20.00	200	1/2	1/4	41.70	
	8.00	10.00	23.00	200	1/2	1/4	84.00	
	10.00	12.00	25.00	160	1/2	1/4	102.00	



CSA standard B-51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

\*Working pressures shown for the hose and braid are based on an operating temperature of 70°F (21°C) with a 4:1 safety factor.

PROJECT	
CUSTOMER	
ENGINEER	
REPRESENTATIVE	
DRAWING #	



4560 Buckley Road  
 Liverpool, NY USA 13088-2509  
 315/437-1611 • Fax 315/437-1903  
 www.flexhose.com • 1.877.METAL EJ